


項	名	稱	材 質	尺 寸	件數
*	A	溫水入管 Inlet Pipe Connection	PVC	2 B (5K)	3 支 PCS
	B	冷水出管 Outlet Pipe Connection	H.D.G.S	2 1/2 B (10K)	1 支 PCS
	C	自動補給水管 Automatic Filler	NYLON	3/4 B	1 支 PCS
	D	手動補給水管 Quick Filler	NYLON	3/4 B	1 支 PCS
	E	溢水管 Overflow	NYLON	2 B	1 支 PCS
	F	排水管 Drain	NYLON	1 B	1 支 PCS

UNIT : 1 SET

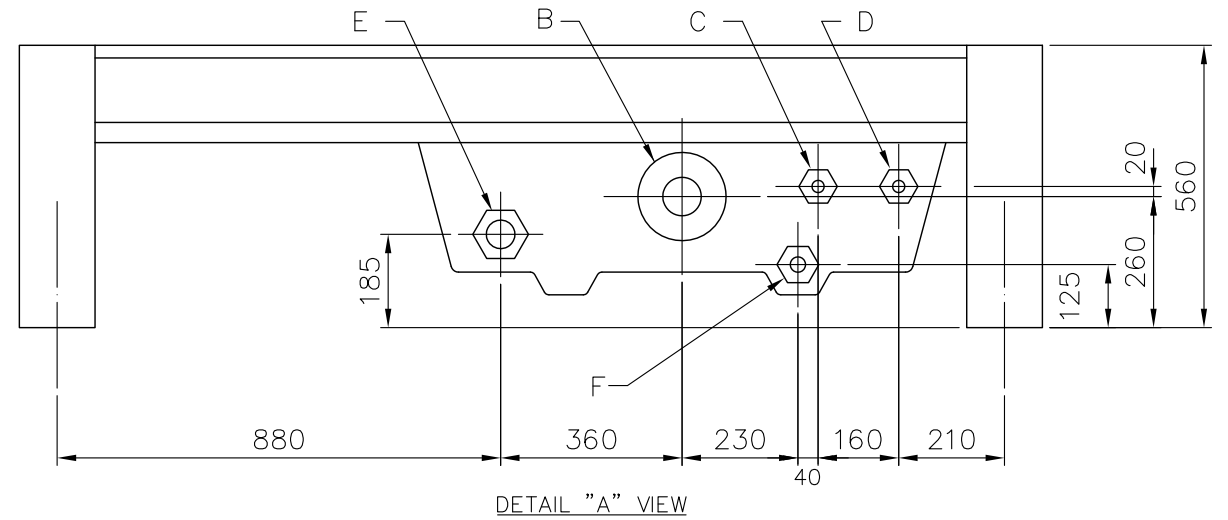

Remark : (\*)When evaluating the piping arrangment , please consider the convenience to dismantale the ejection pipes.  
註:(\*)配管時須注意日後噴管的維修及更換.

冷卻塔空重 Dry weight : 500 kg				運轉重量 Operating Weight : 970 kg			
荷重 Loading Data							
外氣濕球溫度 Ambient Wetbulb Temp: 27℃				冷卻塔運轉水量 Tower Operating Water Flow : 520 LPM/SET			
出水溫度 Outlet Water Temp: 32℃				旁通水量 By Pass Water Flow : LPM/SET			
入水溫度 Inlet Water Temp: 37℃				設計水量 Design Water Flow : 520 LPM/SET			
噴管揚程 Ejection Pipe: 12 M				冷卻能力 Cooling Capacity: 156000Kcal/HR			
設計基準 Design Condition							
變更號碼		日期	變更	核對	核准	記 事 NOTE	
圖 名 TITLE		LFC-N-40					
		外觀圖 OUTLINE VIEW					
核定					MM	1 / 30	103・08・20
校對			製圖		圖 號 DWG NO.		
良機實業股份有限公司 LIANG CHI INDUSTRY CO., LTD.					91-143-7664		